


FULLBACK®V

Premium Siding Insulation for Vinyl




Before Insulation

Thermal imaging reveals two energy leaks: yellow lines where energy escapes through studs, and red at the top of the wall where cavity insulation has settled over time.



After Insulation

Thermal imaging reveals that the wall has turned a cool blue. Energy loss through studs and the top of the wall is no longer visible.

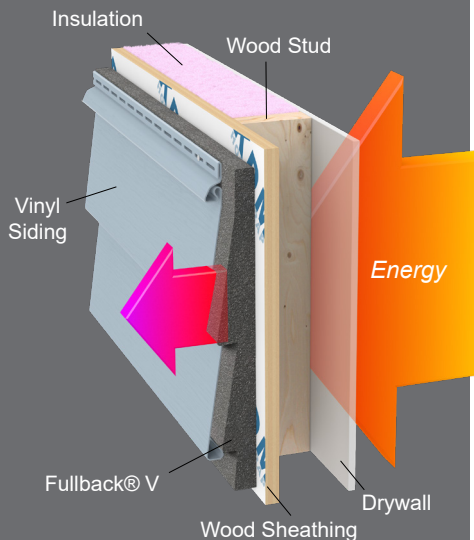

Energy Loss is Robbing You...

Typical Homes Lose Up To:

- 10% through windows
- 15% through doors
- 15% through foundation
- 25% through the roof
- 35% through un-insulated walls!**



Nearly 25% of your home's wall is made up of studs that typically are not insulated, so it's like having one entire wall of your home with no insulation. Adding insulation to your home's exterior under new siding can help your home meet U.S. Department of Energy (DOE) insulation recommendations, as well as state and local codes.

The DOE says, *"When new siding is to be installed, it's a good idea to consider adding insulation under new siding."*

Fullback®V Premium is made from Graphite Polystyrene GPS which contains high-purity graphite particles. The graphite reflects radiant heat, significantly improving insulation capacity compared to EPS insulation, while giving it a dark gray color.



Fullback®V Premium

R-value 2.0-3.7

*R-value varies based on the profile of the siding it is paired with. The more insulation that fits behind the siding, the higher the R-value.

R-value means the resistance to heat flow. The higher the R-value, the greater the insulating power. Tiny air pockets in the insulation resist the transfer of heat. The thicker the insulation, the more air pockets, and higher the R-value.

- Fullback®V Premium is a Building Code Compliant UL Certified Rigid Foam Insulation that helps builders and contractors meet IECC 2009, 2012 and 2015 Residential and Commercial Energy Code for Exterior Continuous Insulation Sheathing.
- Fullback®V Premium is third party tested, qualified and certified under BASF UL Code Evaluation Report 5817-02, it exceeds ASTM minimum insulation requirements by over 20%.

Fullback®V Goes Beyond Energy Savings

Beauty

- Provides additional support to the siding panel, maintaining a perfectly straight appearance over time.
- Eliminates waving, sagging, shifting and warping associated with traditional vinyl siding.


Durability

- Significantly improves the durability of vinyl siding by serving as a shock absorber against impact.
- Deters termite infestation with a built-in termite control agent.
- Protected by a Lifetime Transferrable product warranty, one of the strongest in the industry, covering r-value retention, moisture absorption, and structural integrity.

Moisture & Sound

- Manages moisture with a permeability rating of up to 3.5, helping protect your home from mold and moisture damage.
- Reduces sound transmission by up to 39%, making the indoor home environment more quiet and comfortable.

*Contact PFT Representative for more information

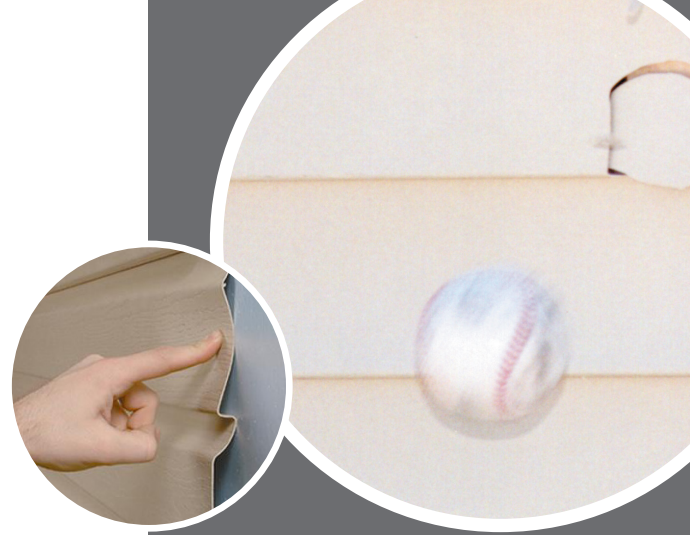

Without Fullback®V

- Hollow void between the wall and the siding leaves vinyl susceptible to damage

Can you tell which siding job has Fullback®V behind it?

With Fullback®V

- Eliminates the hollow void behind vinyl siding, providing increased support and durability
- Foam insulation acts as a shock absorber for the siding



PROGRESSIVEFOAM®
EXPECT EXTRAORDINARY

6753 Chestnut Ridge Road Beach City, Ohio 44608
1-800-860-3626 www.progressivefoam.com

S1198s